INSTALLATION GUIDE FOR PIN1512WS and PIN1712WS

⚠ SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.
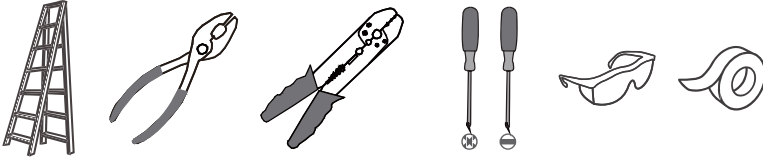
WARNING
- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION
- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).
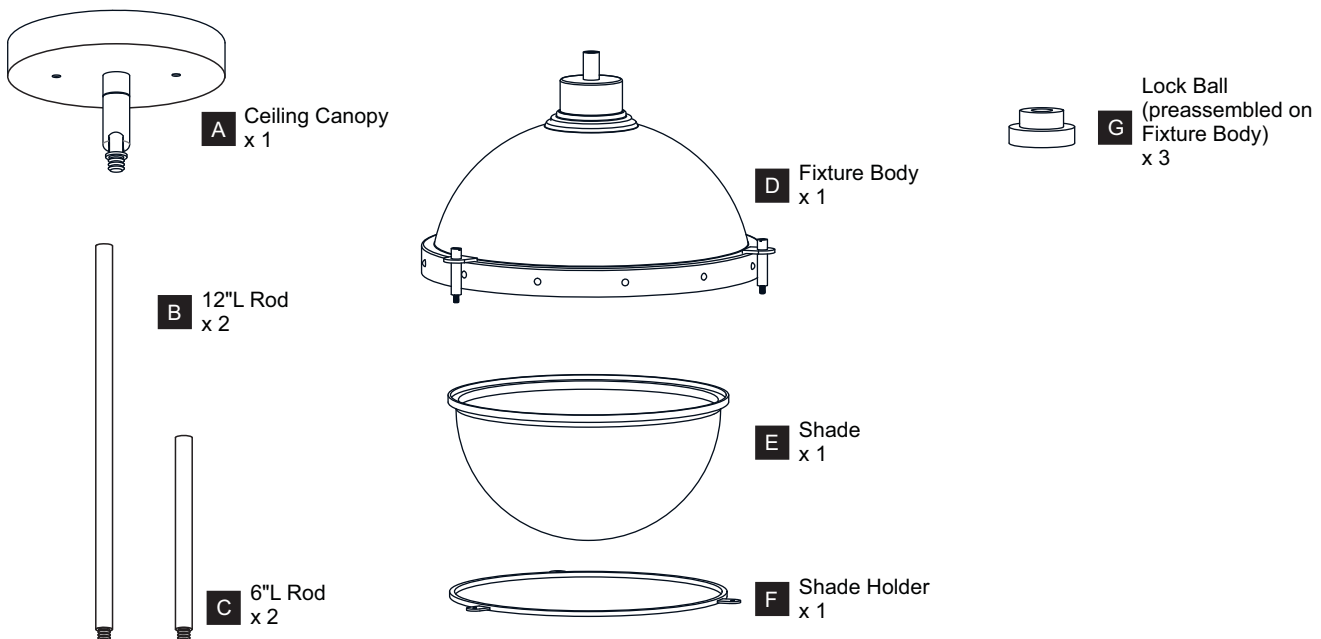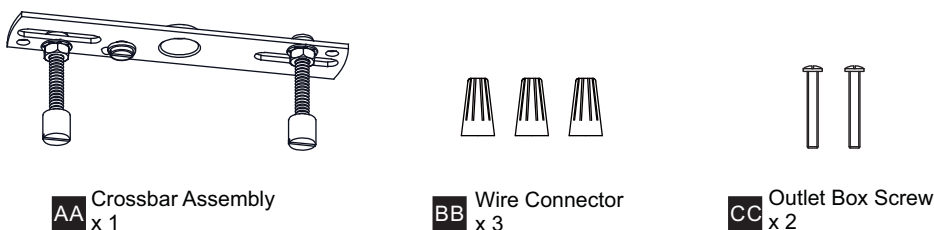
TOOLS REQUIRED

CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

A Ceiling Canopy x 1

B 12"L Rod x 2

C 6"L Rod x 2

D Fixture Body x 1

E Shade x 1

F Shade Holder x 1

G Lock Ball (preassembled on Fixture Body) x 3

MOUNTING HARDWARE

AA Crossbar Assembly x 1

BB Wire Connector x 3

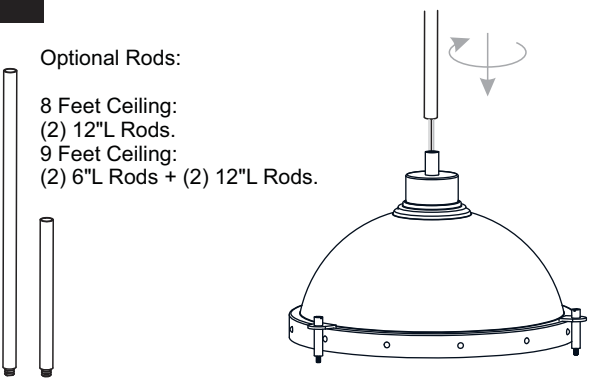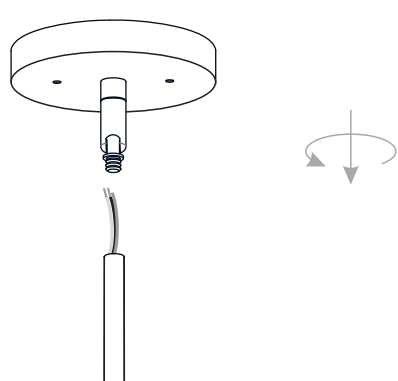**CC** Outlet Box Screw x 2

INSTALLATION

OPTION 1: PENDANT PIN1512WS

1 **Install Rods**

Optional Rods:

8 Feet Ceiling:
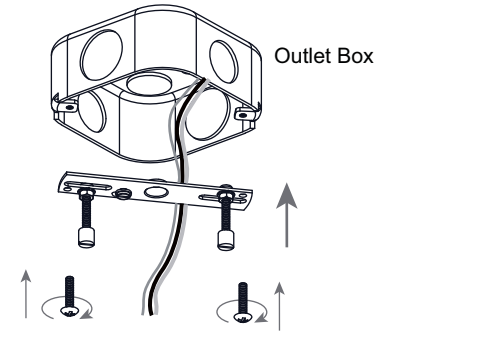(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

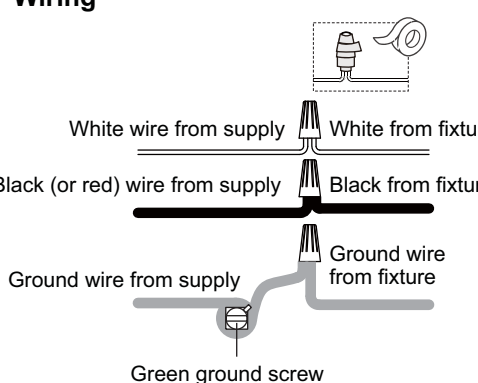**2** **Install Ceiling Canopy to Upper Rod**
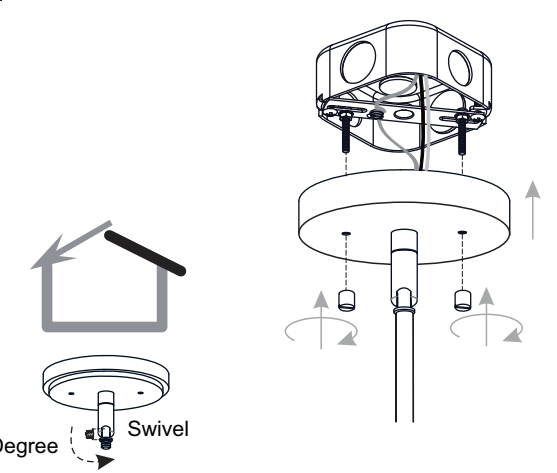
3 **Install Crossbar Assembly**

Outlet Box

4 **Wiring**

White wire from supply — White from fixture

Black (or red) wire from supply — Black from fixture

Ground wire from supply — Ground wire from fixture

Green ground screw

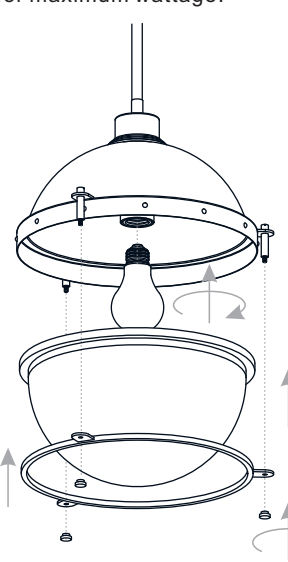**5** **Install Ceiling Canopy to Crossbar Assembly**

90Degree

Swivel

For angled ceilings,
Swivel opening towards wall.

6 **Install Shades and Bulbs**

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

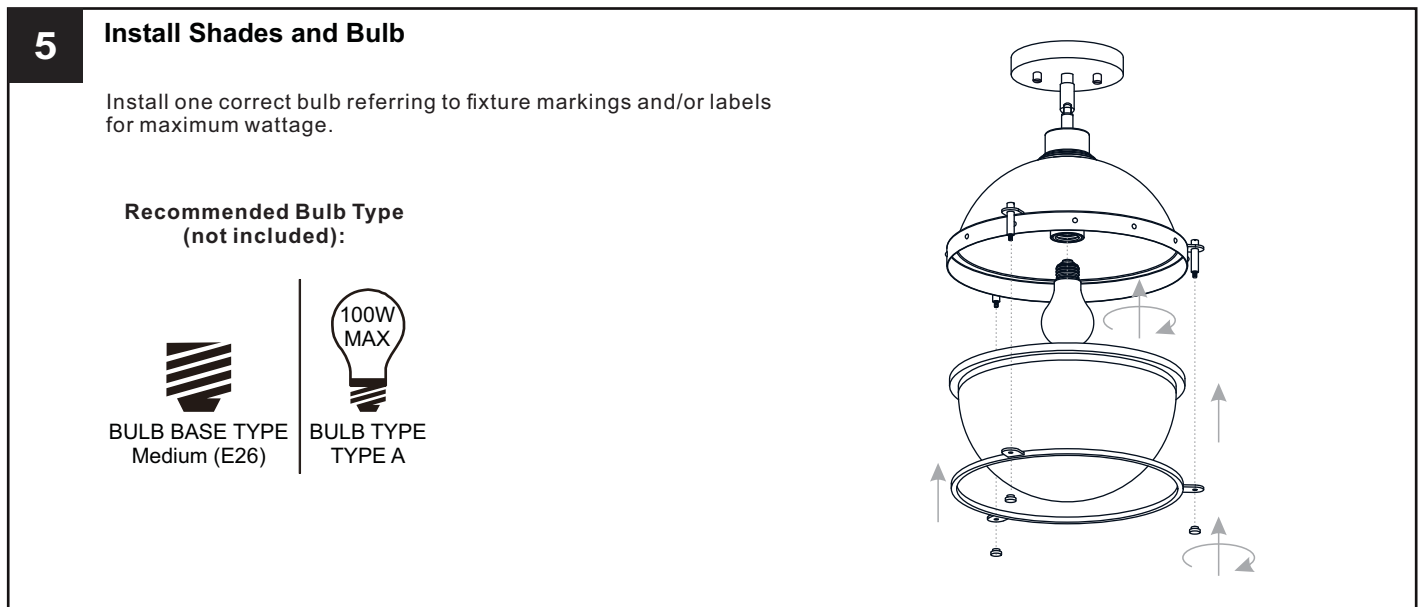**Recommended Bulb Type (not included):**
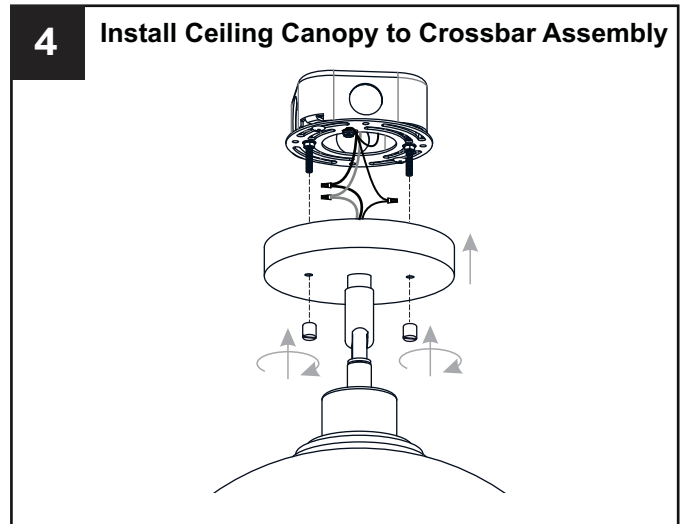
100W MAX

BULB BASE TYPE
Medium (E26)

BULB TYPE
TYPE A

INSTALLATION

OPTION 2: SEMI-FLUSH PIN1712WS

* Set aside the swivel, (2) 6"L Rods and (2) 12"L Rods since they are not required for the semi-flush installation.

1 Install Ceiling Canopy

2 Install Crossbar Assembly

Outlet Box

3 Wiring

White wire from supply — White from fixture

Black (or red) wire from supply — Black from fixture

Ground wire from fixture

Ground wire from supply

Green ground screw

4 Install Ceiling Canopy to Crossbar Assembly

5 Install Shades and Bulb

Install one correct bulb referring to fixture markings and/or labels for maximum wattage.

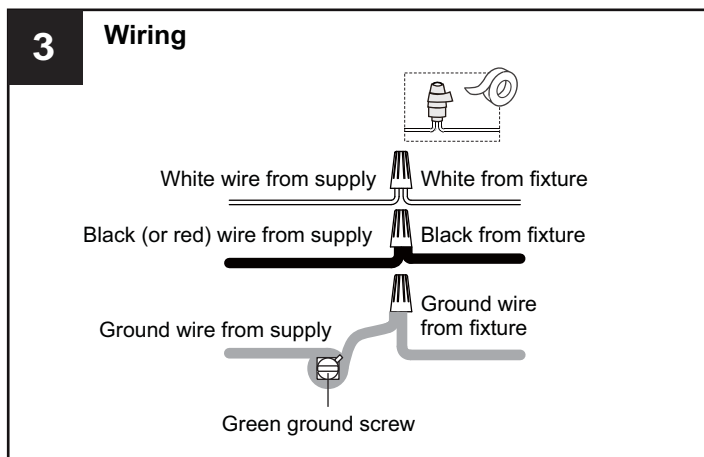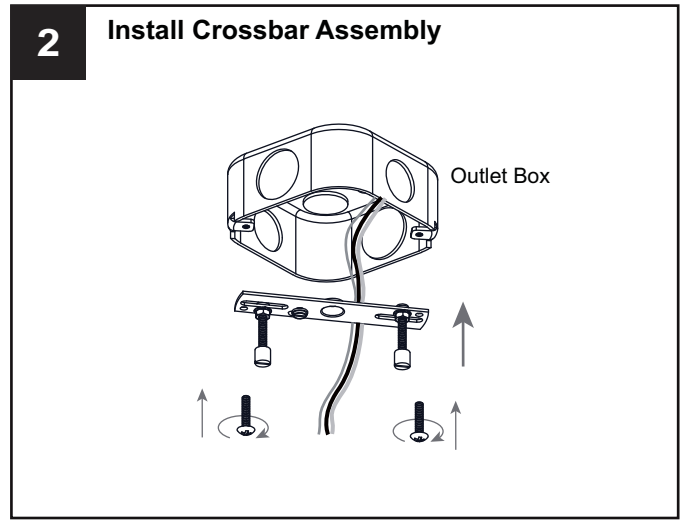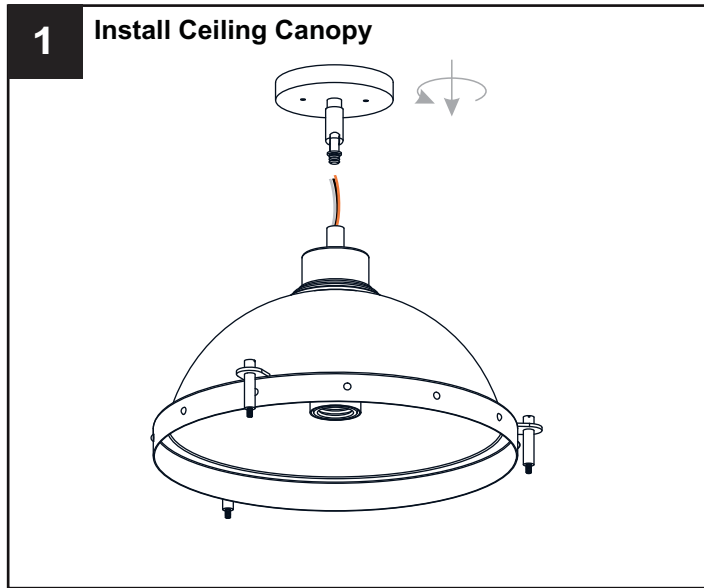**Recommended Bulb Type (not included):**

100W MAX

BULB BASE TYPE
Medium (E26)

BULB TYPE
TYPE A

Your installation is now complete! Restore electricity and save this sheet for future reference.